Mosiężne zaciski z nylonową izolacją męską i żeńską

Model No. JW-TM03



SPECIFICATIONS

Materiał	Mosiądz
Izolacja	Nylon
Temperatura	105 stopni
Powłoka	Cynowa

Mosiężna nylonowa izolacja obudowy męskiej i żeńskiej, zaciski z rękawami flagowymi Roll flag
Izolacja otoczki żeńskiej na końcowej stronie, męska na końcowej stronie, na końcówce flagowej.

Różnorodne specyfikacje dają ci szeroki wybór możliwości.

Kolor jest wyraźny i wyraźny na pierwszy rzut oka podczas użycia

Narzędzia ogólne można zaciskać bez spawania punktowego i innych procesów

Materiał: Mosiądz

Nylon pochowy

Temperatura 105 stopni

Powłoka cynowa do obróbki powierzchniowej

High Quality | Resistant | Multicolor | Safe

With insulated sheathed tube terminal

Complete models to meet your shopping needs



With insulation sheath fork terminal

Safe and secure crimping (for flexible cords)
Current: 19A-48A
Bolt diameter: 3.2~10.5mm




With insulating sheath round terminal


Flame retardant tin plating, good electrical conductivity

Maximum current: 19A-48A
Bolt diameter: 3.2~10.5mm



Insulation sheath female terminal (oval mouth)

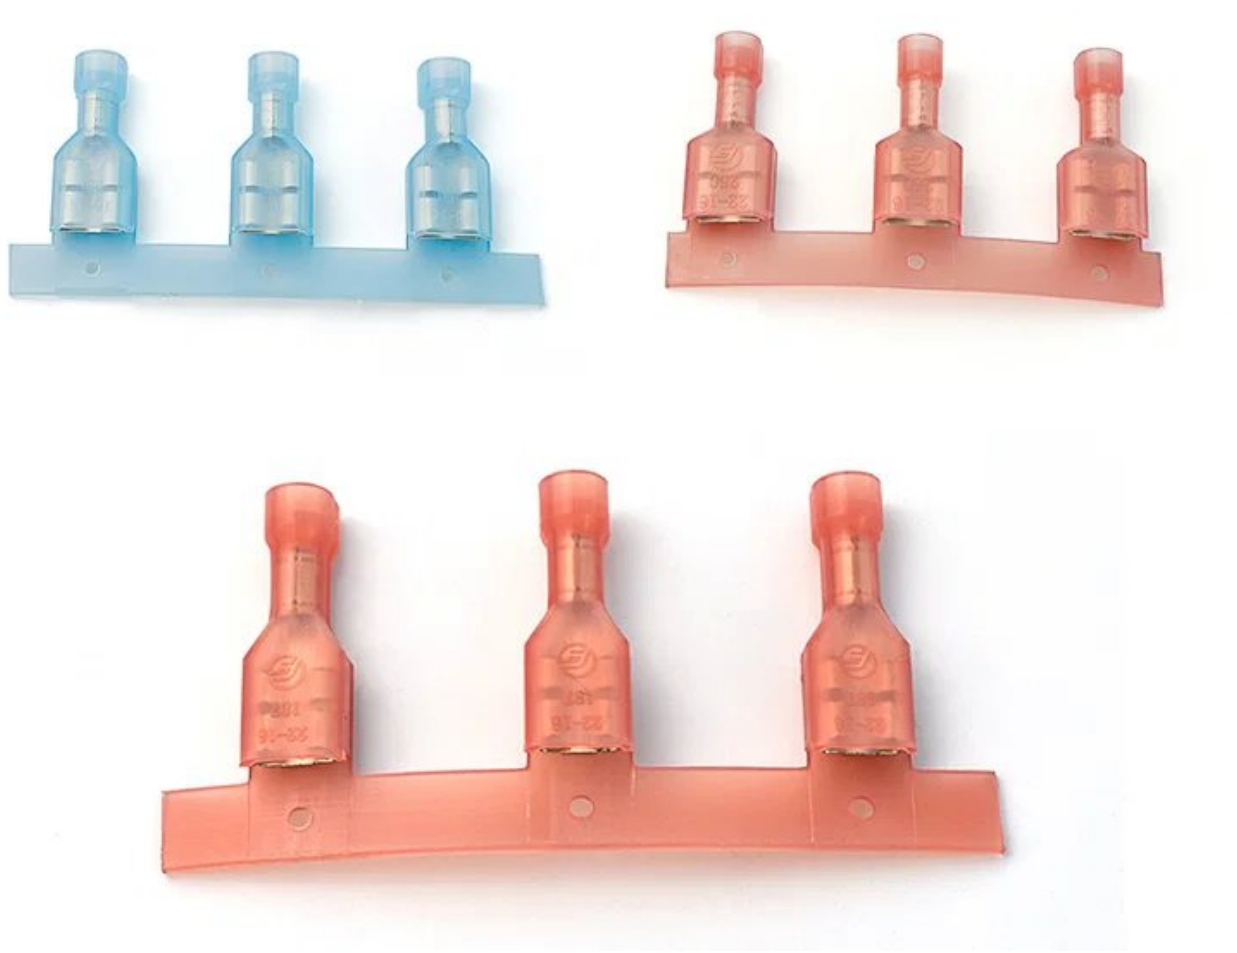


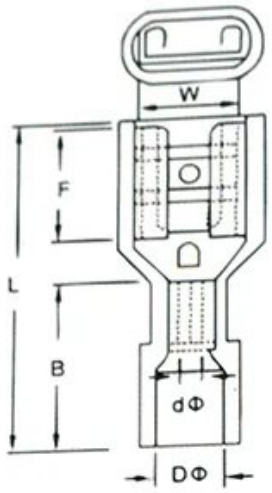


Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	B	Dϕ	dϕ	颜色 Color
FDFN 1.25-110(5)	0.5~1.5 (22~16)	10A	0.5×2.8	0.3	4.0	6.4	19.0	10.5	4.5	1.7	red
FDFN 1.25-110(8)			0.8×2.8	0.3	4.0	6.4	19.0	10.5	4.5		
FDFN 1.25-187(5)			0.5×4.75	0.4	5.0	6.4	21.4	10.5	3.5		
FDFN 1.25-187(8)			0.8×4.75	0.4	5.0	6.4	21.4	10.5	3.5		
FDFN 1.25-250			0.8×6.35	0.4	7.6	7.3	22.0	11.0	4.5		
FDFN 2-187(5)	1.5~2.5 (16~14)	15A	0.8×4.75	0.4	5.0	6.4	21.4	10.5	4.2	2.3	blue
FDFN 2-187(8)			0.8×4.75		5.0	6.4	21.4	10.5	4.2	2.3	
FDFN 2-250			0.8×6.35		7.6	7.3	22.0	11.0	4.8	2.3	
FDFN 5-250	4~6 (12~10)	24A	0.8×6.35	0.45	7.6	7.3	24.2	13.0	6.7	3.4	yellow

Insulation sheath female terminal (square mouth)

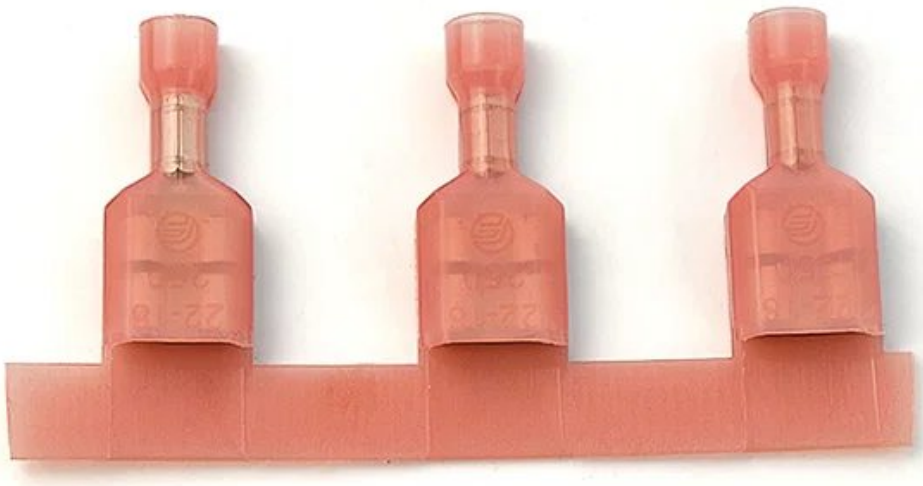

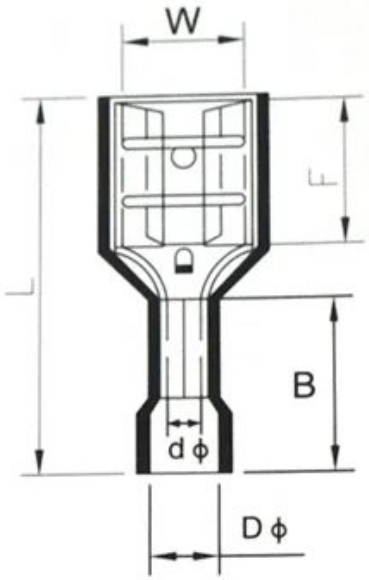


Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
FDFN 1.25-110(5)	0.5~1.5 (22~16)	10A	0.5 × 2.8	0.3	4.0	6.4	18.7	9.0	3.1	1.7	红 red
FDFN 1.25-110(8)			0.8 × 2.8	0.3	4.0	6.4	18.7	9.0	3.1		
FDFN 1.25-187(5)			0.5 × 4.75	0.35	5.9	6.4	22.0	10.5	3.7		
FDFN 1.25-187(8)			0.8 × 4.75	0.35	5.9	6.4	22.0	10.5	3.7		
FDFN 1.25-250			0.8 × 6.35	0.4	7.6	7.6	22.0	10.0	4.5		
FDFN 2-110(5)	1.5~2.5 (16~14)	15A	0.5 × 2.8	0.3	4.0	6.4	18.7	9.0	4.2	2.3	蓝 blue
FDFN 2-110(8)			0.8 × 2.8	0.3	4.0	6.4	18.7	9.0	4.2	2.3	
FDFN 2-187(5)			0.8 × 4.75	0.35	5.9	6.4	21.8	10.0	4.2	2.3	
FDFN 2-187(8)			0.8 × 4.75	0.35	5.9	6.4	21.8	10.0	4.2	2.3	
FDFN 2-250			0.8 × 6.35	0.4	7.6	7.6	22.0	11.0	4.3	2.3	
FDFN 5.5-250	4~6 (12~10)	24A	0.8 × 6.35	0.45	7.6	7.6	23.7	13.0	8.5	3.4	黄 yellow

Fully insulated sheath male terminal (square mouth)





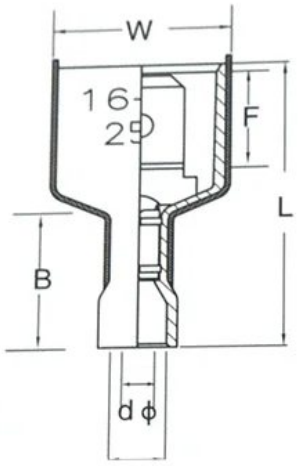

Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
MDFN1.25-187(5)	0.5~1.5 (22~16)	10A	0.5x4.8	0.5	10.4	6.3	20.4	10.0	3.6	1.7	red
MDFN1.25-187(8)	0.5~1.5 (22~16)	10A	0.8x4.8	0.8	10.4	6.3	20.4	10.0	3.6	1.7	
MDFN1.25-250	0.5~1.5 (22~16)	10A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	3.6	1.7	


Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
MDFN2-187(5)	1.5~2.5 (16~14)	15A	0.5x4.8	0.5	10.4	6.3	20.4	10.0	4.3	2.3	blue
MDFN2-187(8)	1.5~2.5 (16~14)	15A	0.8x4.8	0.8	10.4	6.3	20.4	10.0	4.3	2.3	
MDFN2-250	1.5~2.5 (16~14)	15A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	4.3	2.3	

Item NO	Cable Size A.W.G	Max Current	Connecting spec.	Thickness (mm)	Dimension(mm)						Color
					W	F	L	B	D ϕ	d ϕ	
MDFN5.5-250	4~6 (12~10)	24A	0.8x6.35	0.8	12.3	7.7	21.8	10.0	6.5	3.4	yellow

Fully Insulated Sheathed Flag Female Terminals





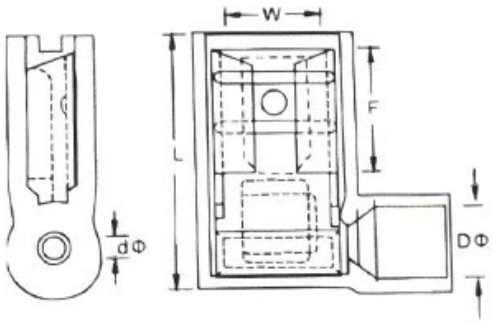

Material: Brass
Sheath: Nylon
Temperature: 105°C
Surface Treatment: Tin Plating

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	Dϕ	dϕ	颜色 Color
FLDNY1.25-187(5)	0.5~1.5 (22~16)	10A	0.5x4.8	0.4	6.9	7.0	16.6	4.6	1.7	红 red
FLDNY1.25-187(8)	0.5~1.5 (22~16)	10A	0.8x4.8	0.4	6.9	7.0	16.6	4.6	1.7	
FLDNY1.25-250	0.5~1.5 (22~16)	10A	0.8x6.35	0.4	8.5	8.0	16.6	4.6	1.7	

型号 Item NO	导线截面mm² Cable Size A.W.G	最大电流 Max Current	接插规格 Connecting spec.	材料厚度 Thickness (mm)	尺寸 Dimension(mm) W	F	L	Dϕ	dϕ	颜色 Color
FLDNY2-187(5)	1.5~2.5 (16~14)	15A	0.5x4.8	0.4	6.9	7.0	16.6	5.3	2.3	蓝 blue
FLDNY2-187(8)	1.5~2.5 (16~14)	15A	0.8x4.8	0.4	6.9	7.0	16.6	5.3	2.3	
FLDNY2-250	1.5~2.5 (16~14)	15A	0.8x6.35	0.4	8.5	8.0	16.6	5.3	2.3	

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal

Brass Nylon insulated sheath male and female terminals Roll flag sleeves terminal, Sleeves Terminal, Insulated Terminal