Ręczna Skręcarka Drutu WPM-NX3612AJ

Model No. WPM-NX3612AJ



SPECIFICATIONS

Napięcie robocze	Zasilacz

Ręczna maszyna do skręcania, półautomatyczna maszyna do skręcania, ręczne narzędzie do skręcania, elektryczna maszyna do skręcania, wielowłóknowa maszyna do skręcania

Parametry techniczne**:**

Napięcie robocze	Zasilacz	Rozmiar **(mm)**	Waga **(g)**	Długość kabla (m)	Długość połączenia przełącznika nożnego **(m)**
DC 24V	Zasilanie: AC100-240V /50/60Hz, Wyjście: DC24V	Długość:248,0 Maksymalny OD: 51,0	535.0	1.2+2.0 (Linia kablowa+przedłużaczka)	2.0
Do drutu o średnicy otworu (mm)	Właściwości skręconego drutu	**Długość rdzenia drutu (mm)**	Maksymalny przekrój skręconego drutu (**mm^2**)	Minimalny przekrój poprzeczny skręconej linii **(mm^2)**	Tryb pracy
8/12	Stosuj do wielordzeniowego elastycznego przewodu	10-20	4.0	0.3	Wyciskanie ręką/ wyciskanie stopą

Handheld desktop dual-purpose electric twisting machine

Multi-strands are used in parallel / can be tightened in half a second / high efficiency



Continuous copper wire Tighten the wire	easy to use Twisting is not tired
efficient Twisting	No hidden danger Non-flying copper wire



Portable mobile twisting tool

Φ13mm large-diameter screw thread opening, adapt to the thickness of the wire diameter, the transparent cover can be removed to make the opening wider

Good twisting quality	Lightweight and compact	Flexible operation	Strong applicability

6 PRODUCT FEATURES

Say goodbye to the problems of hand-tightening, tired and slow screwing



01

Suitable for multi-strand parallel operation, twisted wires within 30mm in length

02

Desktop fixed use with foot switch operation is flexible, and the operation of the entrance port is more convenient

03

Hanging and handheld use does not occupy the position of the console

04

Simple assembly line operation

05

New grip artificial mechanics design

06

Replace manual threading to improve efficiency

Handheld desktop dual-purpose electric twisting machine

Twisted wire range: wire length within 30mm
Multi-strand cord ≤30mm²



1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords can be automatically tightened







Hanging hook
Pedal edge wiring
Body
Manual switch
power cable
transparent lid
Twisting port

Sample display

This machine supports 1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords to be twisted together







Product details





Manual switch

Touch the button switch, tighten the thread in half a second, it's so fast

Twisting clamp

You can put multiple copper core wires into the twisting clamp, touch the button switch to complete the twisting

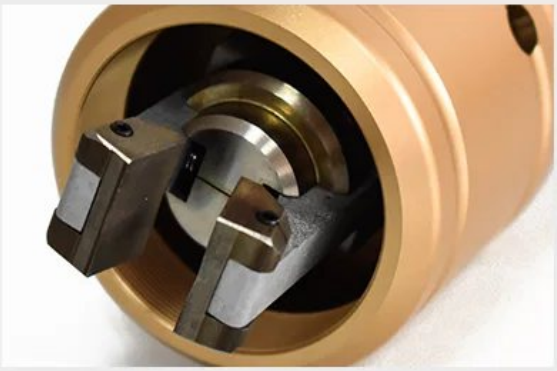

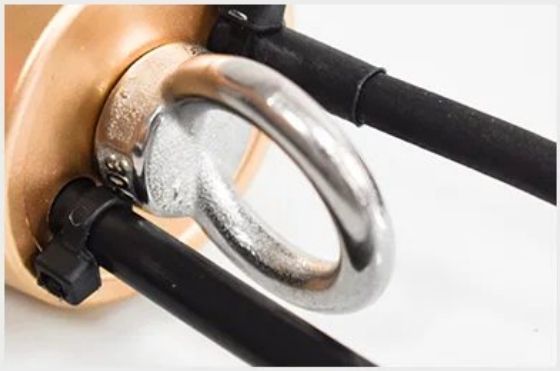

Hanging hook

Hanging and handheld use does not occupy the position of the console

Adjustable voltage

The voltage of the power adapter can be adjusted to a suitable value according to the wire specification, the smaller the wire diameter, and the larger the smaller diameter.





Desktop use

It can be fixed on the desktop, with a foot switch for flexible operation

transparent lid

The twisting machine port has a transparent cover that can be removed, and the transparent cover is larger.



Parts List



FAQ

Jakie napięcie wejściowe przyjmuje półautomatyczna ręczna maszyna do skręcania przewodów WPM-NX3612AJ?

Napięcie wejściowe to AC100-240V przy 50/60Hz, z wyjściem DC24V. Szeroki zakres AC oznacza, że maszynę można stosować w regionach o różnych napięciach sieci bez osobnego transformatora.

Jakie są wymiary fizyczne ręcznej maszyny do skręcania przewodów WPM-NX3612AJ?

Maszyna ma długość 248.0 i maksymalną średnicę zewnętrzną 51.0 (OD). Jej kompaktowy format ręczny jest przeznaczony do prac skręcania wykonywanych bezpośrednio przy wiązce, a nie na stałym stanowisku stołowym.

Czy półautomatyczna ręczna maszyna do skręcania przewodów WPM-NX3612AJ może pracować przy różnych napięciach sieci?

Tak. Przyjmuje AC100-240V przy 50/60Hz i przetwarza to na wyjście DC24V. Ten uniwersalny zakres wejściowy odpowiada półautomatycznemu skręcaniu przewodów w warsztatach pracujących przy niskim lub wysokim napięciu sieci.