
Forma do zaciskania poziomego OTP - wysokiej jakości matryca do maszyn terminalowych

Model No. JW-AP11

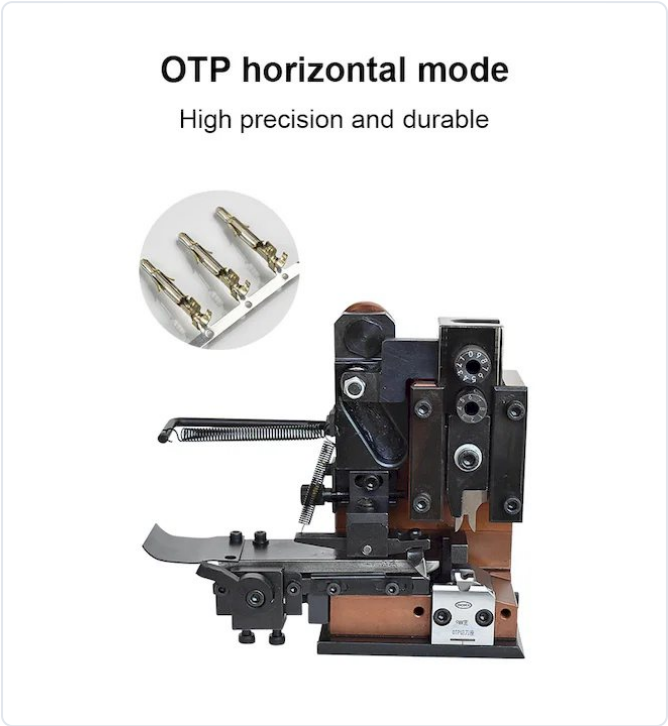

SPECIFICATIONS

Tryb pracy	poziomy
Technologia	wysokiej częstotliwości
Precyzja	wysoka
Hałas	mniejszy niż tradycyjne zaciskanie
Oszczędność energii	tak
Trwałość	wysoka

Formy do zaciskania terminali OTP (tryb poziomy OTP), matryca do maszyn do zaciskania drutu do maszyny terminalowej, maszyna zaciskająca JST, forma w kształcie U OTP, aplikator maszyn terminalnych, forma OTP, forma terminalowa, forma aplikatora końcowego OTP, forma do aplikatora końcowego OTP, formy do zaciskania poziome i pionowe, aplikatory terminalne, formy, formy OTP, formy poziome i pionowe do zaciskania

Formy zaciskowe OTP, tryb poziomy OTP, maszyna do zaciskania drutu, matryca do maszyny terminalowej, ekspres terminalowy Super mute, wykorzystujący technologię wysokich częstotliwości, precyzyjne pozycjonowanie elektroniki. Hałas pracy silnika mniejszy niż tradycyjny zacisk podczas zaciskania pozwala oszczędzać prąd, tryb transferowy jest wygodniejszy i pozwala uniknąć częstych awarii, gdy tradycyjne sprzęgło zaciskowe i elektromagnes się spotykają.
Funkcja naszego aplikatora terminalowego OTP: wysoka precyzja i trwałość

OTP horizontal mode

High precision and durable



Mold general

Suitable for a variety of molds, widely used







Horizontal mode





Vertical mode





Single grain




OTP straight mold

Model: OTP straight mold
Weight: 4.5KG
Feeding block: 35mm
Slider stroke: 30mm
Die knife adjustment: scale rotary
Process type: stamping mould
Main processing equipment: terminal crimping
Provide customized processing: Yes

OTP single grain mold

Model: OTP single grain mold
Weight: 4.5KG
Feeding block: 35mm
Slider stroke: 30mm
Die knife adjustment: scale rotary
Process type: stamping mould
Main processing equipment: terminal crimping
Provide customized processing: Yes

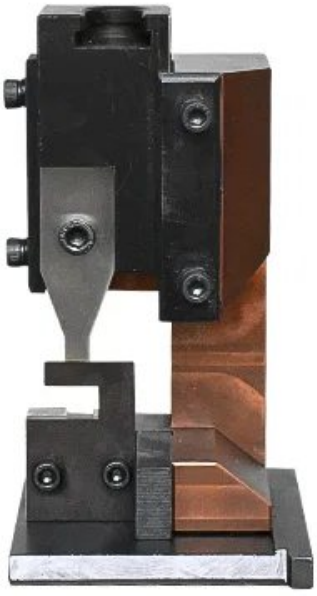



Single U-shaped mold

Model: Single U-shaped mold

Weight: 4.5KG

Feeding block: 35mm

Slider stroke: 45mm

Die knife adjustment: scale fine adjustment

OTP U mold



Model: OTP U-shaped mold

Weight: 4.5KG

Feeding block: 25mm

Slider stroke: 30mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes



Flag model

Model: Flag mold


Weight: 6.5KG

Feeding block: 25mm

Slider stroke: 30mm

Die knife adjustment: scale fine adjustment

2000#mold

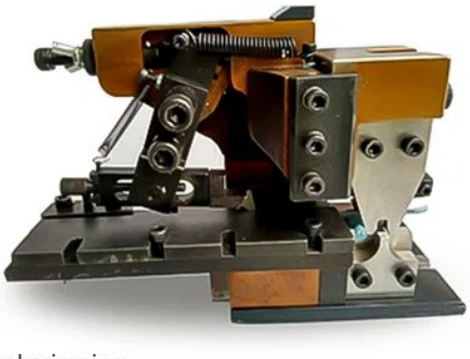

Model: 2000#mold

Weight: 5.2KG

Feeding block: 35mm


Slider stroke: 40-48mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes

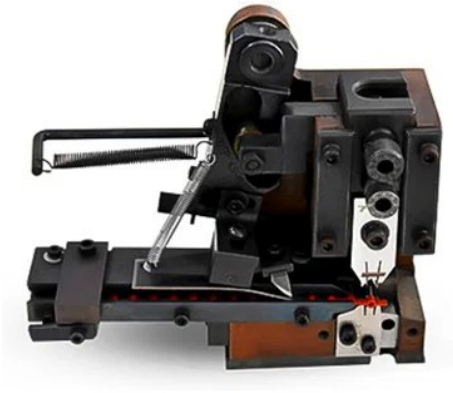

Plastic mould

Model: Plastic with mold

Weight: 4.5KG

Feeding block: 35mm

Slider stroke: 30mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes

OTP high precision horizontal mold



Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 30mm
Scope of application:
It is suitable for high-precision terminal and connection wire manufacturers with very high requirements for crimping. The ingredients are QPQ and heat-treated fine embroidery technology, which can make the product size more accurate, and it is common with JAM, Xinming and terminal machines.



4S-40 pneumatic horizontal die

Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various horizontal terminals

4E-40 pneumatic straight mold



Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various straight terminals



4S-30 pneumatic horizontal die

Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: It is suitable for Japanese series automatic and semi-automatic crimping machines and domestic 30-stroke terminal machines. The crimping knife is common with OTP, and the C.H/I.H adjustment accuracy is 0.02mm.

4E-30 mechanical straight mold



Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 30mm
Scope of application: suitable for automotive terminals, can be used for conventional terminal machines, fine-tuning single grid is 0.02mm, large adjustable range, high precision.



JST horizontal mode

Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: suitable for JST automatic terminal machine and hand punching machine.

JST straight mold

Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: Suitable for JST automatic terminal machine and 40 stroke terminal machine.






JST flag mold

Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: 187/205/250 flagship terminal matching mold, 40 stroke terminal machine.

4TS precision horizontal mold

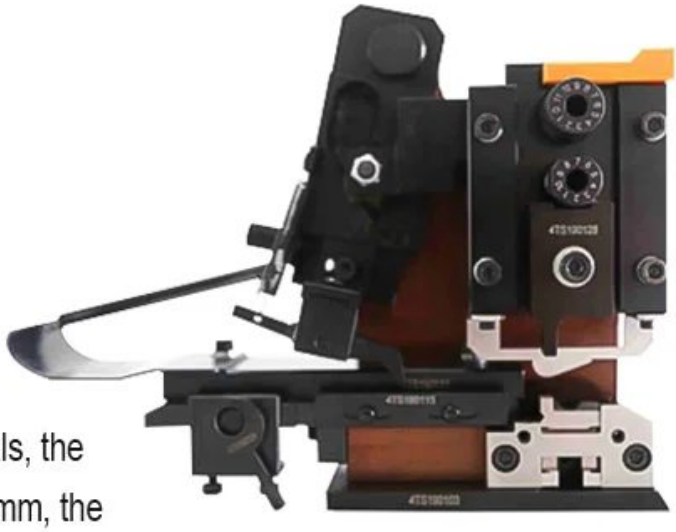

Feeding method: horizontal feed
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.

4TE precision straight mold



Feeding method: direct delivery
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.

OTP terminal crimping molds, OTP horizontal mode, wire crimping machine applicator, die for terminal machine