Zaciski Spade SVN Nylon Izolowane, Miedź 19A-48A

Model No. JW-TM05



SPECIFICATIONS

Materiał	Miedź
Prąd	19A-48A
Średnica zamka	3,2-10,5 mm
Temperatura	75/105 stopni
Osłona	Nylon/PVC
Obróbka powierzchniowa	Powłoka cynowa

Nylonowe zaciski spade SVN Nylon, ciągły końcówka miedzianego przewodu łopatowego, zacisk bolt splice, zacisk Spade, zacisk Svn Spade, Śruba miedziana

Zaciski izolowane łopatą Roll

Bezpieczne i solidne zaciskanie (dla elastycznych przewodów)

Obecny: 19A-48A

Średnica zamka: 3,2-10,5 mm

Materiał: Miedź

Temperatura 75/105 stopni

Nylon/PVC z pochwy

Powłoka cynowa do obróbki powierzchniowej

With insulation sheath fork terminal

Safe and secure crimping (for flexible cords)
Current: 19A-48A
Bolt diameter: 3.2~10.5mm



Stability means that the foundation of the terminal cannot fall off and cannot be broken

It is made by stamping process and stamped on a stamping press, which can effectively resist interference and increase the service life.



Reliable quality of real materials

Exquisite and good selection of materials makes the product
High safety performance and long service life

Copper tinned terminal block

High-quality red copper
conductive must be strong
Surface tin plating process
to resist oxidation



PVC insulation
Flame retardant material

Two materials optional

Nylon insulation
Flame retardant material



With insulation sheath blade terminal


Current: 18A-48A
Copper has good conductivity
Flame retardant and tinned



With insulation sheath spring terminal



Product parameters

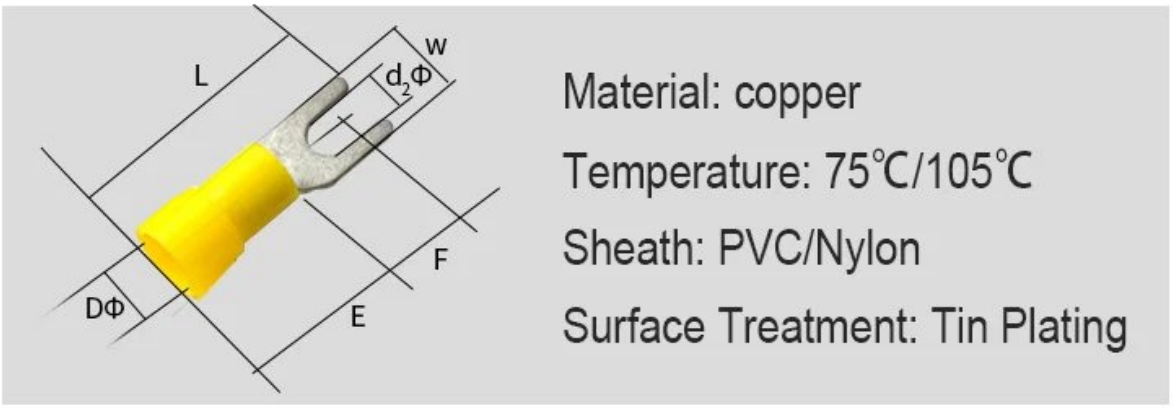

Red (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	size				DΦ
						W	L	F	E	
SVN1.25- 3	0.5-1.5 (22-16)	0.75	19A	#4	3.2	5.7	21.2	6.5	10.0	4.0
SVN1.25-3.5S				#6	3.7	5.7	21 2	6.5		
SVN1.25 3.5L				#6	3.7	6.4	212	6.5		
SVN1.25- 4 S				#8	4.3	6.4	21 2	6.5		
SVN1.25-4 M				#8	4.3	7. 2	21.2	6.5		
SVN1.25-4 L				#8	4.3	8.1	21 2	6.5		
SVN1.25-5 S				#10	5.3	8.1	21 2	6.5		
SVN1.25-5L				#10	5.3	9.5	21 2	6.5		
SVN1.25- -6 S				1/4	6.4	9.5	21 2	6.5		
SVN1.25-6L				1/4	6.4	12.0	27.6	11.0		

FAQ

Jakie wartości prądu znamionowego obejmują końcówki widełkowe izolowane nylonem SVN?

Seria SVN obejmuje wartości prądu znamionowego od 19A do 48A ze stykiem miedzianym. Ten zakres pozwala jednej rodzinie końcówek obsłużyć zarówno lekkie okablowanie sterownicze, jak i cięższe połączenia zasilania.

Na jakie średnice śrub są przeznaczone końcówki widełkowe izolowane nylonem SVN?

Te końcówki widełkowe przyjmują średnice śrub od 3.2 mm do 10.5 mm. Obejmuje to szeroki zakres rozmiarów kołków powszechnie spotykanych w szafach sterowniczych i okablowaniu urządzeń.

Jak dopasować końcówkę widełkową izolowaną nylonem SVN do kołka i obciążenia?

Wybierz średnicę śruby pasującą do twojego kołka, w zakresie od 3.2 do 10.5 mm, a następnie potwierdź, że prąd obwodu mieści się w zakresie od 19A do 48A objętym przez serię.